
Product Datasheet

PET Viewing Barrier

Heavy duty barrier with 30 mm lead shielding and full equivalent lead glass window. Working surfaces are stainless steel and the base contains a removable stainless steel tray designed to contain spills and allow for easy decontamination.

- 30 mm LE-DIN EN 61331-2 (Protective Glass Standard) lead glass.
- BSEN 12588 Lead.
- Stainless steel inner surfaces.

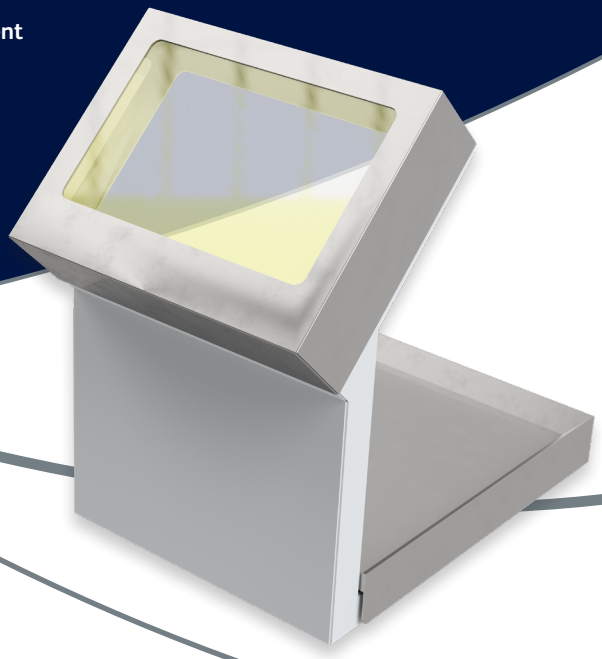

Key Features

- Lead Shielding Options
- Powder Coated Finish

Specifications

Code	Description	Lead Thickness (mm)	Height (mm)	Base Dimensions (W x D) (mm)	Viewing Area (mm)	Weight (Kg)
5BT-LVB6	Standard 6 mm Viewing Barrier	6	545	350 x 435	296 x 185	30
5BT-LVB10	Standard 10 mm Viewing Barrier	10	545	350 x 435	296 x 185	50
5BT-LVB20	Standard 20 mm Viewing Barrier	20	545	350 x 435	296 x 185	100
5BT-LVB30	Standard 30 mm Viewing Barrier	30	545	350 x 435	296 x 185	150
5BT-LBVNSS	Non-standard sizes also available on request					
5BT-LVBSST	Replacement Stainless Steel Tray					

Custom sizes and lead thicknesses available on request

Bright Technologies Ltd
Bri-Tec House, 1 Holbrook Close
Holbrook Commerce Park
Sheffield, S20 3FJ

E-mail: info@britec.net
Tel: +44 (0)114 251 1215

www.britec.net

Version 1.0 May 2026