
Product Datasheet

Unilock® 4 Tungsten Syringe Shields

Tungsten Syringe Shield with the same popular locking mechanism as the UNILOCK® 1 but with the whole of the tungsten barrel being made from tungsten, this gives increased shielding. There is also the added advantage of a wider 6 - 8 mm lead glass window for increased viewing of the syringe graduations. The UNILOCK® 4 has a flat base to prevent rolling whilst in use.

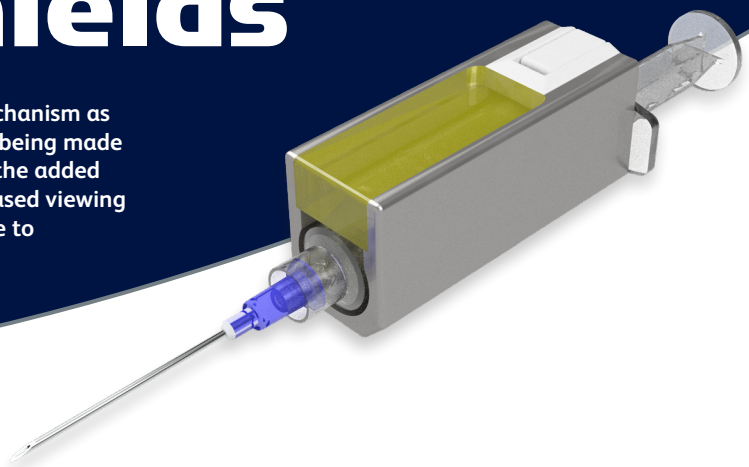

Key Features

- Lead Shielding Options

Specifications

Code	Description	Length (mm)	External Dimensions (mm)	Internal Diameter Tungsten Barrel (mm)	Tungsten Wall Thickness (mm)
1BT-U401A	To fit 1 mL syringes	74	18 x 23	9	2
1BT-U401B	To fit 1 mL syringes	77	18 x 23	9	2
1BT-U401L	To fit 1 mL Luer Lock syringe	75	18 x 23.5	13	2
1BT-U402A	To fit 2 mL syringes	53	18 x 23.5	13	2
1BT-U402B	To fit 2 mL syringes	59	18 x 23.5	13	2
1BT-U403A	To fit 3 mL syringes	65	18 x 23.5	13	2
1BT-U403B	To fit 3 mL syringes	68	18 x 23.5	13	2
1BT-U405A	To fit 5 mL syringes	60	21 x 27	16	2
1BT-U405B	To fit 5 mL syringes	65	21 x 27	16	2
1BT-U410A	To fit 10 mL syringes	75	22 x 30	18	2
1BT-U410B	To fit 10 mL syringes	85	22 x 30	18	2

Custom sizes and different shielding thicknesses available on request

Bright Technologies Ltd
Bri-Tec House, 1 Holbrook Close
Holbrook Commerce Park
Sheffield, S20 3FJ

E-mail: info@britec.net
Tel: +44 (0)114 251 1215

www.britec.net

Version 1.0 May 2026