
Product Datasheet

Shielded Safes

Our range of heavy duty shielded safes comprises of two sizes with either 25 mm or 50 mm lead shielding.

The outer surfaces have a durable powder coated finish and the inside is finished with a stainless steel liner. The safes have a hinged front door, opening either side (depending on customer preference) and are lockable.

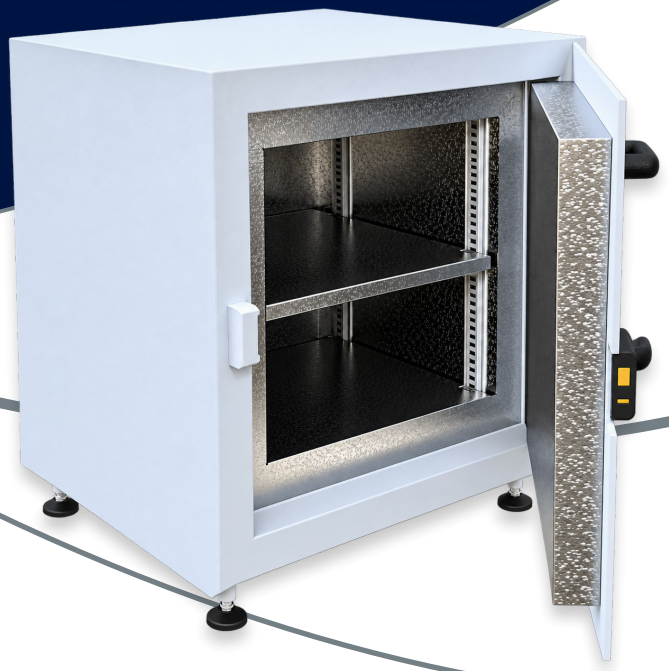

Key Features

- Lead Shielding Options
- Lockable
- Powder Coated Finish

Specifications

Code	Lead Thickness (mm)	Internal Dimensions Lx W x D (mm)	External Dimensions Lx W x D (mm)	Approximate Weight (Kg)
7BT-SSAFE25	25	300 x 300 x 300	485 x 490 x 430	280
7BT-SSAFE50	50	300 x 300 x 300	485 x 490 x 430	320
7BT-SAFEA25	25	465 x 480 x 465	715 x 665 x 815	650
7BT-SAFEA50	50	465 x 480 x 465	715 x 665 x 815	1,170
7BT-SAFEGE68TALL	50	250 x 250 x 452	500 x 434 x 740	635

Custom sizes and different shielding thicknesses available on request

Bright Technologies Ltd
Bri-Tec House, 1 Holbrook Close
Holbrook Commerce Park
Sheffield, S20 3FJ

E-mail: info@britec.net
Tel: +44 (0)114 251 1215

www.britec.net

Version 1.0 May 2026